


Declaration of Performance BIS Pacifyre® System AWM II and AWM III

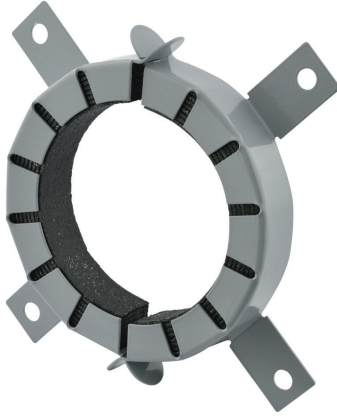

According Annex III of the CPR 305/2011
No. DoP IB03/06 – WM 13/0906

Other countries

Walraven International
P.O. Box 15
3640 AA Mijdrecht (NL)
Tel. +31 (0)297 23 30 00
Fax +31 (0)297 23 30 99
export@walraven.com



Walraven Group

Mijdrecht (NL) · Tienen (BE) · Bayreuth (DE)
Grenoble (FR) · Banbury (GB) · Madrid (ES)
Barcelona (ES) · Mladá Boleslav (CZ)
Kraków (PL) · Kyiv (UA) · Moscow (RU)
Detroit (US) · Shanghai (CN)

DECLARATION OF PERFORMANCE

According to Annex III of the Regulation (EU) Nr.305/2011 (Construction Products Regulation)

BIS Pacifyre® System AWM II

Nr. IB03/06 – WM 13/0906

1. Unique identification code of the product-type:

BIS Pacifyre® System AWM II

2. Type, batch or serial number as required pursuant to Article 11(4):

See Batch number displayed on the product

3. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification:

Fire Stopping and Sealing Products for Penetration Seals, see ETA-13/0906

Pipe Penetrations	Combustible pipes	The field of application has to comply with the content of the ETA-13/0906.
-------------------	-------------------	---

4. Name, registered trade name or registered trade mark and contact address as required pursuant to Article 11(5):

J. van Walraven Holding B.V., Industrieweg 5, 3641RK Mijdrecht, The Netherlands

5. Where applicable, name and address of the authorised representative whose mandate covers the tasks specified in article 12(2):

Not applicable

6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Construction Products Regulation – Annex V:

AVCP – System 1

7. In case of the declaration of performance concerning a construction product covered by a harmonized standard:

Not applicable

8. In case of the declaration of performance concerning a construction product for which an European Technical Assessment has been issued:

The notified body MPA Braunschweig, No. 0761, has performed the initial inspection of the factory and of the factory production control and performs the continuous surveillance, assessment and approval of the factory production on a regular basis according System 1 and issued the following:

Certificate of Conformity: No. 0761 – CPD – 0341 on basis of the ETA-13/0906

9. Declared performance:

Essential characteristics	Declared performance	Harmonised technical specification
Reaction to fire of the intumescent inlay	E	ETA-13/0906
Reaction to fire of the metal casing of the collar	A1	
Fire resistance as a pipe sealing for combustible pipes through flexible wall, rigid wall, or rigid floor constructions by means of the fire protection collar type AWM II with a maximum dimension of 400 mm or the type AWM III with a maximum dimension of 160 mm	Max. EI 240 U / C or. Max. EI 120 U / U	
Dangerous substances	None	
Durability and serviceability	Use category Type X	
Other	NPD	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Kasper Mandersloot
Product Manager BIS Fire Protection Systems
Mijdrecht, 01.07.2013
J. van Walraven Holding B.V

